


SAFES AND CABINETS

CELEBRATING 190 YEARS OF TRUST
PRODUCT CATALOGUE 2025



Chubb safesTM
Trusted the world over.



Scan, explore, and follow
Chubbsafes on LinkedIn
and enjoy a full year of
Chubbsafes stories

JOIN THE CELEBRATION!

This anniversary is a shared milestone—a chance for us to celebrate not only our heritage but also the distributors, partners, and employees who make Chubbsafes possible. Join us in honouring the past and building the future together.

Be part of our journey on social media. Follow us for anniversary stories, share your own experiences with Chubbsafes, and see why we are “Trusted the World Over.”

Join the celebration on LinkedIn [#Chubbsafes190Years](#)



T2

SECURITY UPGRADE

Shown here is the TriForce T2 which has undergone explosion testing (EX).

BURGLARY RESISTANCE SECURITY UPGRADE

The EN standard used in certifying safes and cabinets with a high level of burglary resistance has been recently updated to accommodate advanced tooling. These new tools are now listed in the standard under the “T2” tool list.

This means more sophisticated and powerful tools like a new generation of circular saws and thermal lances are used in independent burglary tests to prove our products’ ability to resist them. This upgrade guarantees the highest current performance in physical security.

Chubb safes is one of the first brands in the physical security industry to launch T2-certified safes. Learn more about the T2 security upgrade on our website www.chubbsafes.com.



A SYMBOL OF CHUBBSAFES™
190 YEARS OF EXCELLENCE

Chubbsafes™

1835



Scan, explore, and
purchase your
Chubbsafes 1835
today!

CHUBBSAFES™ 1835 SPECIAL EDITION

Chubbsafes™ 1835 is a limited release to celebrate Chubbsafes' 190 years of heritage, trust and innovation. With only 190 units available worldwide, this is your chance to own an exclusive collector's item built for strength and designed to last.

- Limited run of 190 safes, each individually numbered for authenticity.
- Crafted to meet the highest standards of reliability and precision.
- A collector's item reflecting care, durability, and innovation.
- Choose from four distinct colours: green, red, blue, and white.

Find out more on the product page in this catalog.

CONTENTS

| | |
|-------------------|----|
| FINDING YOUR SAFE | 7 |
| TEST STANDARDS | 8 |
| PRODUCT OVERVIEW | 10 |
| LOCKING OPTIONS | 11 |
| PRODUCTS | |
| OPTIONAL FITTINGS | 52 |

ICONS EXPLAINED



| | |
|---------------------|----|
| Consul | 12 |
| Senator | 13 |
| Chubb safes™ 1835 | 14 |
| DuoGuard GI T2 | 15 |
| DuoGuard GII T2 | 16 |
| DuoGuard GIII | 17 |
| ProGuard GIII | 18 |
| Vega | 19 |
| Europa GI-III T2 | 20 |
| Europa GV T2 | 21 |
| Europa GVI | 22 |
| DuoForce T2 | 23 |
| TriForce T2 | 24 |
| Sigma Deposit | 25 |
| Omega Deposit | 26 |
| Rhino Mk II DT | 27 |
| Europa Deposit | 28 |
| ProGuard DT | 29 |
| Executive | 30 |
| DPC | 31 |
| 6000 Series Files | 32 |
| Fire File 25" | 33 |
| Fire File 31" | 34 |
| Lateral Fire File | 35 |
| Binder Fire File | 36 |
| Ultra Fire file 31" | 37 |
| DataGuard NT | 38 |
| Air Hotel | 39 |
| Air | 40 |
| Regal | 41 |
| AlphaPlus | 42 |
| HomeStar | 43 |
| Fortis | 44 |
| HomeSafe S2 30P | 45 |
| Viper | 46 |
| Rhino Mk II | 47 |
| Mini Banker Mk II | 48 |
| Archive Cabinet | 49 |
| ForceGuard | 50 |

CERTIFIED BY DEKRA

ISO-CERTIFIED PRODUCTION SITES

We list sustainability very high on our agenda; setting high standards for our products, our employee working conditions and for the environment in which we live.

The Chubb safes products that are manufactured in our production sites are created under the most stringent production processes following the principles of the latest quality, health and safety and environmental management systems, and demonstrate our clear commitment to sustainability.



All Gunnebo Safe Storage production sites are certified according to ISO 14001 Environmental Management System, ISO 9001 Quality Management System and ISO 45001/OHSAS 18001 Occupational Health & Safety System.

WHICH **SAFE** IS RIGHT FOR YOU?

The most important initial question is what you want to protect – cash and valuables, documents or data media?

CASH AND VALUABLES

Choose from the burglary protection range. This includes safes, cabinets, vaults & vault doors, designed to withstand physical attacks in different strengths or Grades. Each Grade represents a particular “cash rating” which is the amount an insurer will cover. The actual amount of cover can vary between insurance companies and country, and may be different to the manufacturer's recommended rating. You should always check what cover your insurance company is prepared to offer.

DOCUMENTS AND DATA MEDIA

Choose from the fire protection range which includes safes and filing cabinets designed to keep documents or data media safe from the effects of a fire.

DOCUMENTS

To survive a fire, documents require protection from temperatures higher than 170°C. Therefore cabinets have to be specifically designed, tested and then certified for this task. Without a credible certification, you cannot be sure that your documents are safe.

DATA MEDIA

The same is valid for data media, except here the cabinet must offer much greater protection due to the sensitivity of the material. If the inside of the cabinet exceeds a mere 50°C, then the information on a CD, DVD or tape will be destroyed.



CERTIFIED STRENGTH

To provide the appropriate level of protection, the products are tested to comply with the latest industry standards. The various certification tests carried out in independent laboratories for burglary or fire protection are conducted by experienced operators armed with plans of the product and a whole range of tools.

FOR BURGLARY PROTECTION, safes and vaults are awarded grades:

- For security cabinets, there are Grades S1 and S2 (EN 14450).
- For safes, vaults and vault doors, they are rated from Grade 0 to Grade XIII (EN 1143-1).
- High security locks are graded according to EN 1300 in security levels A, B, C and D, the highest.

During the certification process, door panels of the products, bolt works, locks and handles are tested. The certification tests include an attack program that is devised so that various break-in attempts can be made using a selection of tools. A correlation between tool type and the time for which each one is used can be used to obtain a resistance score (resistance unit). The higher the score, the higher the level of resistance. Based on the results obtained, the safe is given a classification and then listed in a resistance grade.

FOR FIRE PROTECTION, these standards vary according to whether you want to protect paper documents, digital media or other highly sensitive objects. This is because the temperature at which data media (e.g. 50°C) and documents (e.g. 170°C) deteriorate differs according to the item protected:

- In order to fully protect data media, industry standards indicate that products should carry ECB•S EN 1047-1, UL 72 Class 125 or NT Fire 017 60/120 DIS.


The ECB•S and UL tests monitor the internal temperature of the data cabinet until it has completely cooled down during the “soakout” period. Assessing products during this period is essential, since internal temperatures can peak up to six to eight hours after a fire has been extinguished. Such tests ensure that all products are comprehensively tested and, upon passing, will fully protect your data media for the specific time period stated.

- For document protection, all products must have an appropriate industry standard 30-, 60- or 120-minute paper certificate.


UL 72 Class 350, ECB•S EN 1047-1, EN 15659 or NT Fire 017 are acceptable standards for paper document protection.

LEVELS OF RESISTANCE

Alongside extremely strict standards, you will also find a number of others that are less stringent in terms of resistance.

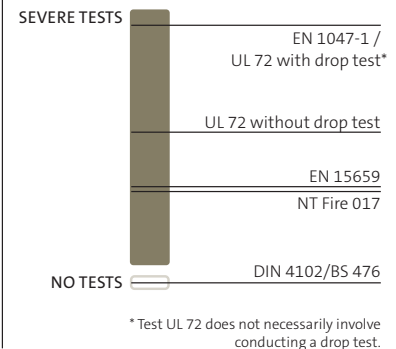

HIGHEST ALLOWED INSIDE TEMPERATURE

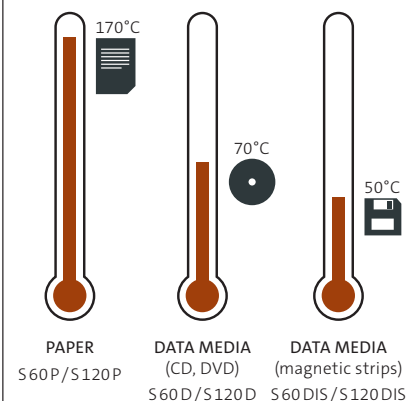

STANDARD IN BRIEF

| STANDARDS | TEMPERATURE TEST | DROP TEST | PAPER | DATA MEDIA | COOLING |
|-----------------|------------------|--|--|---|--------------------------|
| EN 1047-1 | 1090°C | 9.15 metres | S 60 P (60 min.) / S 120 P (120 min.) | S 60 DIS (60 min.) / S 120 DIS (120 min.) | incl. the cooling period |
| UL 72 | 1090°C | 9.15 metres (In UL the drop test is optional so always check what is being claimed) | Class 350 (½, 1, 2 hours) | Class 125 (½, 1, 2 hours) | incl. the cooling period |
| EN 15659 | 850°C | no | LFS 30 P (30 min.) / LFS 60 P (60 min.) | no application | not tested |
| NT Fire 017 | 1090°C | no | 60 paper (60 min.) / 90 paper (90 min.) / 120 paper (120 min.) | 60 diskettes (60 min.) / 120 diskette (120 min.) | not tested |
| DIN 4102/BS 476 | not tested | not tested | not tested | not tested | not tested |

EUROPEAN CERTIFICATION FOR SAFES EXPLAINED

In order to attest to the quality of a certified product, an information plate is adhered to the inside of the product. This provides you with guarantees that the product has been tested and manufactured in an environment that has been checked by the certifying body.

Below is shown the ECB-S label and the details listed on the information plate.

BURGLARY PROTECTION CERTIFICATION

SERIAL NO.

Each product can be identified by a unique serial number. This number is given by the certifying body

EN 1143-1/EN 14450

The European standard that the product meets

CERT. MARK. NO.

Certificate number issued by the certifying body

RESISTANCE GRADE


Resistance classes

WEIGHT

The safe's net weight. A 5% tolerance in the net weight indicated is accepted

YEAR OF MANUFACTURE

The year that the product was manufactured

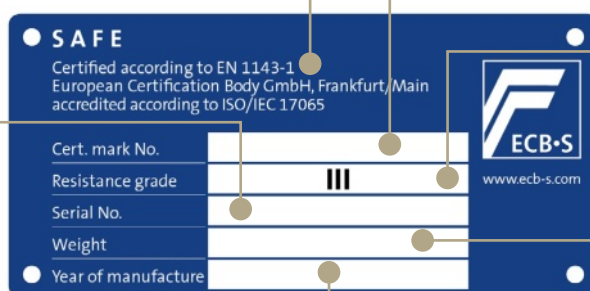

FIRE PROTECTION CERTIFICATION

SERIAL NO.

Each product can be identified by a unique serial number. This number is given by the certifying body

EN 1047-1/EN 15659

The European standard that the product meets

CERT. MARK. NO.

Certificate number issued by the certifying body

PROTECTION CLASS


Resistance classes

WEIGHT

The safe's net weight. A 10% tolerance in the net weight indicated is accepted

YEAR OF MANUFACTURE

The year that the product was manufactured

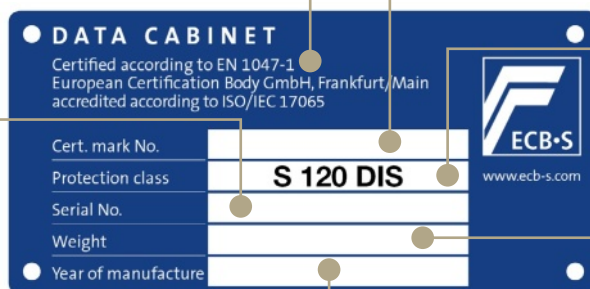

Fire testing is undertaken by independent laboratories with certificates issued by certification authorities. Here are some examples of test institutes and certificates that you may encounter: ECB-S, UL, iBMB, MPA Dresden, Applus RTD, RISE, VdS.

FOR MORE DETAILED INFORMATION, contact your insurance company or visit the chubbsafes.com website.

SAFES BY CERTIFICATION

N.B.: **RISE** (Research Institutes of Sweden) is formerly known as **SP** (Technical Research Institute of Sweden).

*CD = Core Drill Protection.

| PRODUCT | STANDARD | CLASSIFICATION | CERTIFICATION BODY |
|--|--|---|---|
| BURGLARY PROTECTION | | | |
| Air | n/a | n/a | n/a |
| Air Hotel | n/a | n/a | n/a |
| Alpha Plus | n/a | n/a | n/a |
| Consul | EN 1143-1 | Grade 0 to I | ECB+S |
| Europa GV T2 | EN 1143-1 | Grade V T2 | ECB+S |
| Europa GVI | EN 1143-1 | Grade VI | ECB+S |
| Europa Deposit | n/a | n/a | n/a |
| ForceGuard | n/a | n/a | n/a |
| Fortis | EN 14450 | Level S2 | ECB+S |
| HomeStar | n/a | Silver Level | Sold Secure |
| Omega Deposit | n/a | n/a | n/a |
| ProGuard GIII | EN 1143-1 | Grade III | ECB+S |
| ProGuard DT | EN 1143-2 | Grade DI to DII | ECB+S |
| Regal | n/a | n/a | n/a |
| Rhino Mk II DT | n/a | n/a | n/a |
| Sigma Deposit | n/a | n/a | n/a |
| Vega | EN 1143-1 | Grade V | ECB+S |
| FIRE PROTECTION | | | |
| 6000 Series Files | EN 15659 | LFS 60 P | ECB+S |
| Archive Cabinet | n/a | n/a | n/a |
| Binder Fire File | UL 72 Class 350 | 2h Fire Resistance | UL |
| DataGuard NT | NT Fire 017 | 120 Diskette | RISE |
| DPC | UL 72 Class 350 | 2h Fire Resistance | UL |
| Executive | NT Fire 017 & UL 72 Class 350 | 60 Paper & 1h Fire Resistance | RISE & UL |
| Fire File 25" | UL 72 Class 350 | 1h Fire Resistance | UL |
| Fire File 31" | UL 72 Class 350 | 1h to 2h Fire Resistance | UL |
| Lateral Fire File | UL 72 Class 350 | 1h Fire Resistance | UL |
| Ultra Fire File 31" | UL 72 Class 350 | 1h to 2h Fire and Impact Resistance | UL |
| COMBINED BURGLARY & FIRE PROTECTION | | | |
| ChubbSafes™ 1835 | EN 1143-1 & EN 1047-1 | Grade I T2 & S 60 P | ECB+S |
| DataPlus | EN 14450 & EN 1047-1 & UL 72 Class 125 | Level S2 & S 120 DIS & 2h Fire Resistance | ECB+S & UL |
| DuoForce T2 | EN 1143-1 & NT Fire 017 | Grade IV T2 to VI T2 (optional CD*) & 60 Paper | ECB+S |
| DuoGuard GI T2 | EN 1143-1 & EN 1047-1 | Grade I T2 & S 60 P | ECB+S |
| DuoGuard GII T2 | EN 1143-1 & NT Fire 017 | Grade II T2 & 90 Paper | ECB+S & RISE |
| DuoGuard GIII | EN 1143-1 & NT Fire 017 | Grade III & 60 Paper | ECB+S |
| Europa GI-III T2 | EN 1143-1 & NT Fire 017 | Grade I T2 to III T2 & 60 Paper | ECB+S & RISE |
| HomeSafe S2 30P / Viper | EN 14450 & EN 15659 | Level S2 & LFS 30 P | ECB+S |
| Mini Banker Mk II | EN 14450 & JIS S 1037 | Level S2 & 1h | ECB+S & Bandung Institute of Technology |
| Rhino Mk II | EN 14450 & EN 15659 | Level S2 & LFS 60 P | ECB+S |
| Rhino Mk II DT | n/a | n/a | n/a |
| Senator | EN 1143-1 & EN 15659 | Grade I & LFS 30 P | ECB+S |
| COMBINED BURGLARY, FIRE & EXPLOSION PROTECTION | | | |
| TriForce T2 | EN 1143-1 & NT Fire 017 | Grade IV T2 to VI T2 & Grade IV T2 EX to Grade VI T2 EX (optional CD*) & 60 Paper | ECB+S |

WHICH LOCK IS RIGHT FOR YOU?

Depending on the range, you can customise your product with a different lock. Thus you can benefit from a comprehensive lock offering that includes the latest industry solutions, which offer a wide range of features. So whether it be the “mechanical combination” lock or an electronic solution, you can be sure to have a lock that will meet your security needs. Below the key terms associated with the range of locks.

DEFINITIONS

KEY LOCK: A manual key-operated lock.

MECHANICAL COMBINATION: A mechanical keyless dial lock with a changeable combination.

ELECTRONIC LOCK: An electronically-operated keypad lock with a changeable combination.

MANAGER MODE: Allows one user to control the functions of other combination holders.

NUMBER OF USERS: The number of users able to program in their own access code.

DURESS FEATURE: An alarm engineer can link the lock into a monitored alarm system. Then, using a given procedure, the lock can be operated, the safe opened and a silent signal given to the monitoring station that this is being done under duress.

TIME DELAY: This feature allows for a pre-set delay between operating the lock and being able to open the safe. The operation may vary between lock types.

TIME LOCK: Time lock allows the user to set periods during which the lock may be operated, e.g. during business hours only. The options available will vary between locks.

AUDIT TRAIL: The lock is able to give a report (it will vary in detail from model to model) of usage and may show times of operation, codes used and operations performed.

DUAL CONTROL: Allows two users to enter their details before any operation can be performed.





MODEL SHOWN: CONSUL M-15

CONSUL

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Market leading light weight allows for easier installation.
- Burglary protection in accordance with EN 1143-1, as certified by ECB-S for Grade 0 and I.
- Composite door made from 10mm steel with an overall thickness of 35mm.
- The body is 45 mm overall, comprising the inner and outer steel walls, the space between which is filled with a multi-material burglary resistant barrier.
- 25mm diameter steel bolts secure the door, three operating horizontally and two each vertically upwards and downwards.
- Recessed door & concealed internal hinges which give a smooth finish & prevent areas of attack.
- Model 25 & above has the ability to store A4 Binders.
- Consul comes in two lock options:
 - Double-bitted 8 lever, EN 1300 Class A certified key lock to which two 90mm keys are supplied.
 - A user-programmable, EN 1300 Class B electronic lock capable of accepting two differing user codes and a time-delay function.
- The safe is prepared & anchoring kit is supplied to allow the Consul range to be securely base- or rear-fixed to resist unauthorised removal once installed.

PRODUCT SPECIFICATIONS

Grade 0/Grade I

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) |
|-------|----------------------|---------------------|---------------------|----------------------|---------------------|---------------------|-------------------|-----------------|
| M-15 | 280/- | 370/- | 350/- | 190/- | 280/- | 250/- | 13/- | 40/- |
| M-20 | -/330 | -/450 | -/330 | -/240 | -/360 | -/230 | -/20 | -/50 |
| M-25 | 330 | 450 | 400 | 240 | 360 | 300 | 26 | 54/59 |
| M-40 | 450 | 450 | 400 | 360 | 360 | 300 | 39 | 67/72 |
| M-50 | 570 | 450 | 400 | 480 | 360 | 300 | 52 | 81/86 |
| M-65 | 690 | 450 | 400 | 600 | 360 | 300 | 65 | 94/100 |
| M-80 | -/850 | -/450 | -/400 | -/760 | -/360 | -/300 | -/82 | -/117 |


External dimensions exclude handle and hinge projections. In line with certification, weights can vary by +/- 5%.



MODEL SHOWN: SENATOR M-65

SENATOR

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Dual Certification: Burglary (EN 1143-1) Grade I and Fire (EN 15659, LFS 30 P).
- Certified locks: EN 1300 certified Class A key lock or Class B high-security electronic lock.
- Four models available: 32, 46, 63 or 190 litres.
- Secure bolt work and traditional heavy weight design.
- Enhanced design: removable door for easy installation and a reduced overall weight by 15%.
- Fittings: each safe is supplied with one shelf as standard.
- Attractive appearance: single-colour door and body in dark grey (RAL 7016).
- Ideal for the home or office.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) |
|-------|----------------------|---------------------|---------------------|----------------------|---------------------|---------------------|-------------------|-----------------|
| M-30 | 370 | 500 | 403 | 290 | 420 | 263 | 32 | 121 |
| M-45 | 500 | 500 | 403 | 420 | 420 | 263 | 46 | 150 |
| M-65 | 650 | 500 | 403 | 570 | 420 | 263 | 63 | 183 |
| M-190 | 862 | 654 | 563 | 782 | 574 | 423 | 190 | 329 |


External dimensions exclude handle and hinge projections. In line with certification, weights can vary by +/- 5%.



MODEL SHOWN: CHUBBSAFES™ 1835 IN BRITISH RACING GREEN

CHUBBSAFES™ 1835

BURGLARY & FIRE-RESISTANT PROTECTION
SPECIAL EDITION LIMITED TO 190 UNITS



A SYMBOL OF CHUBBSAFES™ 190 YEARS OF EXCELLENCE

- A limited release to celebrate Chubb safes' 190 years of heritage, trust and innovation. More than a secure storage solution but a piece of history.
- Each safe individually numbered for authenticity.
- Unique composite body: An innovative, lightweight, multi-layered construction delivering both certified burglary and fire protection.
- Luxury internal fittings: Fully lined, leather finished drawers for jewellery and precious items as well as automated watch winders.
- Certified protection: Certified to the most recent versions of European Standards, EN 1143-1 Grade I T2 burglary resistance and EN 1047-1 class S 60 P, 60 minutes fire protection for documents.
- Automatic electronic locking: Secured by an EN 1300 Class B certified electronic lock, automatically engaging when the door is closed and bolts thrown.
- Trident handle: Paying homage to Chubb safes' rich history and the TDR models of the 1960's, it also functions as a visual indicator of the door's locking status.
- Four distinctive colours: Green, Red, Blue and White. Complements any interior, blending style with functionality. The use of copper highlights the material's use in the high security safes and strong room doors of the 1970's and 80's.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) |
|-------|----------------------|---------------------|---------------------|----------------------|---------------------|---------------------|-------------------|-----------------|
| M-140 | 1150 | 528 | 490 | 1050 | 428 | 315 | 142 | 237 |


External dimensions exclude handle and hinge projections. In line with certification, weights can vary by +/- 5%.



MODEL SHOWN: DUOGUARD M-445

DUOGUARD GI T2

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Burglary protection in accordance to the highest certified resistance levels, available in Grade I T2, certified by ECB•S in accordance with the stringent European standard, EN 1143-1 T2. DuoGuard hereby complies and is certified with the world's strictest requirements for quality and burglary resistance.
- Approved by ECB•S in accordance with EN 1047-1 in class S 60 P for one hour's fire protection of paper documents.
- Torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight and minimising transportation and installation costs.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity.
- The three-way boltwork is made from solid steel bolts.
- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to withstand burglary attempts.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width* (mm) | External Depth** (mm) | Internal Height (mm) | Internal Width*** (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) |
|-------|----------------------|----------------------|-----------------------|----------------------|------------------------|---------------------|-------------------|-----------------|
| M-40 | 435 | 500 | 456 | 335 | 400 | 295 | 40 | 100 |
| M-60 | 530 | 500 | 521 | 430 | 400 | 360 | 62 | 123 |
| M-115 | 690 | 600 | 561 | 590 | 500 | 386 | 114 | 175 |
| M-150 | 875 | 600 | 561 | 775 | 500 | 386 | 150 | 212 |
| M-205 | 1150 | 600 | 561 | 1050 | 500 | 386 | 203 | 264 |
| M-290 | 1600 | 600 | 561 | 1500 | 500 | 386 | 290 | 337 |
| M-355 | 1600 | 675 | 585 | 1500 | 575 | 410 | 354 | 374 |
| M-445 | 1850 | 675 | 615 | 1750 | 575 | 440 | 443 | 436 |

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 51


Projection of hinge* (20mm) and projection of handle** (65mm) not included. *** Width excluding shelf racking strips. Racking reduces the internal width by 15mm



MODEL SHOWN: DUOGUARD GII M-115

DUOGUARD GII T2

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Burglary protection in accordance to the highest certified resistance levels, available in Grade II T2, certified by ECB•S in accordance with the stringent European standard, EN 1143-1 T2. DuoGuard hereby complies and is certified with the world's strictest requirements for quality and burglary resistance.
- Approved by RISE Research Institutes of Sweden in accordance with fire resistance class NT Fire 017 – 90 paper and RISE's certification rules for fire resisting storage cabinets, SPCR 002.
- Torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight and minimising transportation and installation costs.
- The three-way boltwork is made from solid steel bolts.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to withstand burglary attempts.
- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width* (mm) | External Depth** (mm) | Internal Height (mm) | Internal Width*** (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) |
|-------|----------------------|----------------------|-----------------------|----------------------|------------------------|---------------------|-------------------|-----------------|
| M-65 | 578 | 526 | 547 | 452 | 400 | 360 | 65 | 265 |
| M-115 | 716 | 626 | 587 | 590 | 500 | 386 | 114 | 379 |
| M-150 | 901 | 626 | 587 | 775 | 500 | 386 | 150 | 456 |
| M-205 | 1176 | 626 | 587 | 1050 | 500 | 386 | 203 | 582 |
| M-290 | 1626 | 626 | 587 | 1500 | 500 | 386 | 290 | 748 |
| M-355 | 1626 | 701 | 611 | 1500 | 575 | 410 | 354 | 829 |
| M-445 | 1876 | 701 | 641 | 1750 | 575 | 440 | 443 | 970 |

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 51

Projection of hinge* (20mm) and projection of handle** (65mm) not included. ***Width excluding shelf racking strips. Racking reduces the internal width by 15mm



MODEL SHOWN: DUOGUARD M-505

DUOGUARD GIII

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Burglary protection in accordance with the European standard, EN 1143-1, as certified by ECB•S for Grade III.
- Certified for 1 hour fire resistance by ECB•S in accordance with fire resistance class NT Fire 017 – 60 paper and RISE's certification rules for fire resisting storage cabinets
- Torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight and minimising transportation and installation costs.
- The three-way boltwork is constructed from 28mm diameter solid steel bolts.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to withstand burglary attempts.
- A Class B mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options. The primary lock can be supplemented by a combination lock or both a key lock and electronic lock can be fitted.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width* (mm) | External Depth** (mm) | Internal Height (mm) | Internal Width*** (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) | No. of Shelves |
|-------|----------------------|----------------------|-----------------------|----------------------|------------------------|---------------------|-------------------|-----------------|----------------|
| M-160 | 901 | 626 | 587 | 785 | 510 | 396 | 159 | 415 | 2 |
| M-215 | 1176 | 626 | 587 | 1060 | 510 | 396 | 214 | 517 | 2 |
| M-305 | 1626 | 626 | 587 | 1510 | 510 | 396 | 305 | 687 | 3 |
| M-370 | 1626 | 701 | 611 | 1510 | 585 | 420 | 371 | 753 | 3 |
| M-465 | 1876 | 701 | 641 | 1760 | 585 | 450 | 463 | 880 | 4 |
| M-505 | 1876 | 701 | 681 | 1760 | 585 | 490 | 505 | 915 | 4 |

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 51

Projection of hinge* (20mm) and projection of handle** (65mm) not included. *** Width excluding shelf racking strips. Racking reduces the internal width by 15mm



MODEL SHOWN: PROGUARD M-370

PROGUARD GIII

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Burglary protection in accordance with the European EN 1143-1 standard, as certified by ECB•S for Grade III.
- ProGuard's special barrier material provides certified burglary protection whilst also keeping the total weight of the safe down. Less weight means lower transportation costs and greater installation options.
- A higher level of protection can be offered in a safe with reduced wall thickness and increased interior capacity.
- The three-way boltwork is constructed with solid steel bolts.
- For additional security, ProGuard is fitted with an active relocker and anti-drilling plates have been incorporated into the boltwork to withstand burglary attempts.
- Either a mechanical key lock or a high-security electronic lock can be used as the primary lock option. At least one EN 1300 Grade B lock must be fitted as standard.
- Every model can be customised with a range of internal fittings to maximise storage capacity. NOTE: Brackets need to be ordered for each fitting
- ProGuard has a modern design with an ergonomic soft-touch handle.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) |
|-------|----------------------|---------------------|---------------------|----------------------|---------------------|---------------------|-------------------|-----------------|
| M-65 | 530 | 500 | 521 | 440 | 410 | 359 | 65 | 208 |
| M-120 | 690 | 600 | 561 | 600 | 510 | 396 | 121 | 320 |
| M-160 | 875 | 600 | 561 | 785 | 510 | 396 | 159 | 386 |
| M-215 | 1150 | 600 | 561 | 1060 | 510 | 396 | 214 | 481 |
| M-305 | 1600 | 600 | 561 | 1510 | 510 | 396 | 305 | 636 |
| M-365 | 1295 | 785 | 620 | 1205 | 695 | 530 | 363 | 685 |
| M-370 | 1600 | 675 | 585 | 1510 | 585 | 420 | 371 | 701 |
| M-465 | 1850 | 675 | 615 | 1760 | 585 | 450 | 463 | 827 |

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 51

External dimensions exclude handle and hinge projections. In line with certification, weights can vary by +/- 5%.



MODEL SHOWN: VEGA M-40

VEGA

BURGLARY-RESISTANT PROTECTION




KEY FEATURES

- Capable of being installed in confined spaces.
- EN 1143-1 Grade V certified by ECB•S for universal acceptance.
- Designed to be anchored to the floor or rear wall. Anchor points are provided along with an appropriate and approved anchor bolt.
- Sized to fit into confined spaces such as wardrobes, under counters and within furniture.
- Two high security locks fitted which can be customised to suit client's needs.
- Weigh less than 300Kg
- Reduced door furniture profile to give greater installation possibilities.
- Door can be removed by trained installers to make installation easier in difficult to access locations.
- Secured by 32mm diameter strong steel bolts with three operating horizontally, one each vertically top and bottom and a full height engagement bar on the hinge side.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Width With Door Open 180° (mm) | Depth With Door Open 90° (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) | No. of Shelves |
|-------|----------------------|---------------------|---------------------|--------------------------------|-------------------------------|----------------------|---------------------|---------------------|-------------------|-----------------|----------------|
| M 40 | 485 | 525 | 498 | 968 | 986 | 355 | 395 | 278 | 39 | 296 | 1 |

Door furniture projects 55mm beyond the body depth. In line with certification, weights can vary by +/- 5%.

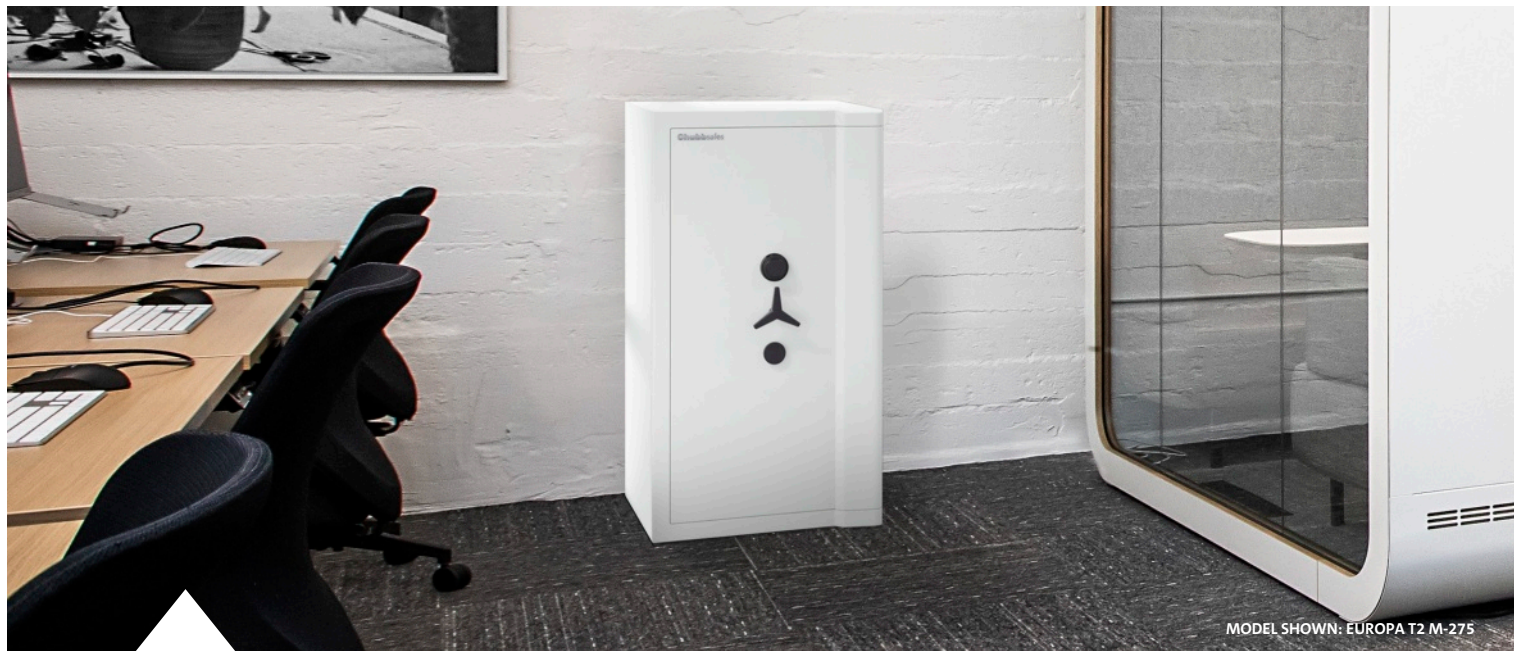

MODEL SHOWN: EUROPA T2 M-275

EUROPA GI-III T2



FIRE & BURGLARY-RESISTANT PROTECTION IN GRADES I T2, II T2, AND III T2

KEY FEATURES

- Professional high security safe protecting valuables up to the highest certified resistance levels, available in Grades I T2, II T2 and III T2, certified by ECB•S in accordance with the stringent European standard, EN 1143-1 T2. Europa hereby complies and is certified with the world's strictest requirements for quality and burglary resistance.
- EN 1143-1:2019 is the latest version of this globally respected burglary resistant standard. The new T2 classification includes tests with the more powerful and effective versions of the tools available to burglars today.
- Europa Grade I T2, II T2 & III T2 are certified NT Fire 017 – 60 Paper for one-hour protection of paper from fire by RISE (Research Institutes of Sweden).
- A choice of locking options are available at additional costs.
- Each safe can be equipped with high quality fittings to maximize storage requirements
- Base fixing is standard on all models.
- Light grey finish (RAL 9002).

PRODUCT SPECIFICATIONS

| Model | Available T2 Grades | External Height (mm) | External Width (mm) | External Depth (mm) | Depth incl. Handle & Hinge (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Depth with Door at 90° Open (mm) | Width with Door Fully Open (mm) | Capacity (litres) | Net Weight (kg) T2 Grade I/II/III |
|-------|---------------------|----------------------|---------------------|---------------------|---------------------------------|----------------------|---------------------|---------------------|----------------------------------|---------------------------------|-------------------|-----------------------------------|
| M-30 | I | 568 | 508 | 450 | 507 | 400 | 340 | 209 | 904 | 900 | 28 | 279/-/- |
| M-60 | I,II | 628 | 528 | 603 | 660 | 460 | 360 | 360 | 1077 | 941 | 60 | 375/381/- |
| M-115 | I,II,III | 718 | 668 | 663 | 720 | 550 | 500 | 420 | 1277 | 1232 | 116 | 534/536/545 |
| M-180 | I,II,III | 1018 | 668 | 663 | 720 | 850 | 500 | 420 | 1277 | 1232 | 179 | 676/705/724 |
| M-275 | I,II,III | 1208 | 668 | 773 | 830 | 1040 | 500 | 530 | 1387 | 1232 | 276 | 906/880/931 |
| M-345 | I,II,III | 1468 | 668 | 773 | 830 | 1300 | 500 | 530 | 1387 | 1232 | 345 | 1030/1060/1097 |
| M-505 | I,II,III | 1796 | 903 | 663 | 720 | 1628 | 735 | 420 | 1512 | 1691 | 503 | 1320/1370/1418 |
| M-635 | I,II,III | 1796 | 903 | 773 | 830 | 1628 | 735 | 530 | 1622 | 1691 | 634 | 1480/1571/1638 |

External dimensions exclude handle and hinge projections. In line with certification, weights can vary by +/- 5%.



EUROPA GV T2

BURGLARY-RESISTANT PROTECTION IN GRADE V T2



KEY FEATURES

- Professional high security safe protecting valuables up to the highest certified resistance levels, available in Grade V T2, certified by ECB•S in accordance with the stringent European standard, EN 1143-1 T2. Europa hereby complies and is certified with the world's strictest requirements for quality and burglary resistance.
- EN 1143-1:2019 is the latest version of this globally respected burglary resistant standard. The new T2 classification includes tests with the more powerful and effective versions of the tools available to burglars today.
- A choice of locking options are available at additional costs.
- Each safe can be equipped with high quality fittings to maximize storage requirements.
- Base fixing is standard on all models.
- Light grey finish (RAL 9002).

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Depth incl. Handle & Hinge (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Depth with Door at 90° Open (mm) | Width with Door Fully Open (mm) | Capacity (L) | Net Weight (kg) |
|-------|----------------------|---------------------|---------------------|---------------------------------|----------------------|---------------------|---------------------|----------------------------------|---------------------------------|--------------|-----------------|
| M-140 | 718 | 668 | 663 | 720 | 588 | 538 | 444 | 1277 | 1232 | 141 | 583 |
| M-210 | 1018 | 668 | 663 | 720 | 888 | 538 | 444 | 1277 | 1232 | 212 | 773 |
| M-320 | 1208 | 668 | 773 | 830 | 1078 | 538 | 554 | 1387 | 1232 | 321 | 983 |
| M-400 | 1468 | 668 | 773 | 830 | 1338 | 538 | 554 | 1387 | 1232 | 399 | 1153 |
| M-570 | 1796 | 903 | 663 | 720 | 1666 | 773 | 444 | 1512 | 1691 | 572 | 1523 |
| M-715 | 1796 | 903 | 773 | 830 | 1666 | 773 | 554 | 1622 | 1691 | 714 | 1683 |

External dimensions exclude handle and hinge projections. In line with certification, weights can vary by +/- 5%.



MODEL SHOWN: EUROPA M-180

EUROPA GVI

BURGLARY-RESISTANT PROTECTION IN GRADE VI



KEY FEATURES

- Professional high security safe protecting valuables, certified by ECB-S in accordance with the stringent European standard.
- A choice of locking options are available at additional costs.
- Each safe can be equipped with high quality fittings to maximize storage requirements.
- Base fixing is standard on all models.
- Light grey finish (RAL 9002).

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Depth incl. Handle & Hinge (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Depth with Door at 90° Open (mm) | Width with Door Fully Open (mm) | Capacity (L) | Net Weight (kg) |
|-------|----------------------|---------------------|---------------------|---------------------------------|----------------------|---------------------|---------------------|----------------------------------|---------------------------------|--------------|-----------------|
| M-180 | 1038 | 688 | 663 | 720 | 850 | 500 | 423 | 1285 | 1235 | 180 | 1012 |
| M-275 | 1228 | 688 | 773 | 830 | 1040 | 500 | 533 | 1395 | 1235 | 277 | 1296 |
| M-345 | 1488 | 688 | 773 | 830 | 1300 | 500 | 533 | 1395 | 1695 | 347 | 1535 |
| M-505 | 1816 | 923 | 663 | 720 | 1628 | 735 | 423 | 1520 | 1695 | 506 | 2089 |
| M-640 | 1816 | 923 | 773 | 830 | 1628 | 735 | 533 | 1630 | 1695 | 638 | 2271 |

External dimensions exclude handle and hinge projections. In line with certification, weights can vary by +/- 5%.



MODEL SHOWN: DUOFORCE T2 M-245

DUOFORCE T2

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Burglary resistance in accordance with the updated and more stringent European standard, EN 1143-1:2019 T2, as certified by ECB•S for Grade IV T2 to VI T2.
- Meets the demands of all insurance companies when it comes to burglary resistance.
- Tested by an independent, ISO 17025 accredited laboratory according to the NT Fire 017 – 60 Paper standard with certification managed by ECB•S. Protects your vital documents from the effects of fire.
- Optional Planar Protection is a fully integrated, alarm wiring matrix within the safe body.
- Optional Core Drill (CD) resistance in accordance with the stringent European standard EN 1143-1:2019 T2, certified by ECB•S for Grade IV T2 CD to VI T2 CD. This is an industry first, whilst at the same time retaining fire protection.
- Supplied with two locks as standard with the option of a factory-fitted electronic lock. This gives the flexibility to customise how DuoForce T2 can be secured and operated
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity

| Model | External Height (mm) Gr. IV,V/VI | External Width (mm) Gr. IV,V/VI | External Depth (mm) Gr. IV,V/VI | Internal Height (mm) Gr. IV,V/VI | Internal Width (mm) Gr. IV,V/VI | Internal Depth (mm) Gr. IV,V/VI | Capacity (litres) Gr. IV,V/VI | Net Weight (kg) Gr. IV/V/VI | Net Weight with CD (kg) Gr. IV/V/VI | No. of Shelves |
|--------|-------------------------------------|------------------------------------|------------------------------------|-------------------------------------|------------------------------------|------------------------------------|----------------------------------|--------------------------------|--|----------------|
| M-65 | 739/- | 574/- | 584/- | 555/- | 390/- | 303/- | 65/- | 541/577/- | 562/596/- | 1 |
| M-95 | 974/994 | 574/594 | 584/604 | 790 | 390 | 303 | 95 | 679/727/801 | 706/752/825 | 2 |
| M-245 | 974/994 | 824/844 | 764/784 | 790 | 640 | 483 | 245 | 1058/1137/1268 | 1103/1181/1312 | 2 |
| M-405 | 1494/1514 | 824/844 | 764/784 | 1310 | 640 | 483 | 405 | 1444/1588/1741 | 1513/1654/1808 | 3 |
| M-520 | 1874/1894 | 824/844 | 764/787 | 1690 | 640 | 483 | 520 | 1816/1993/2187 | 1904/2070/2264 | 4 |
| M-885 | 1874/1894 | 1274/1294 | 764/784 | 1690 | 1090 | 483 | 885 | 2517/2766/3033 | 2649/2873/3141 | 4 |
| M-1090 | 1874/1894 | 1524/1544 | 764/784 | 1690 | 1340 | 483 | 1090 | 2889/3180/3488 | 3041/3309/3617 | 4 |

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 51

CD=Core Drill. External dimensions exclude handle and hinge projections. In line with certification, weights can vary by +/- 5%.



MODEL SHOWN: TRIFORCE T2 M-405

TRIFORCE T2

BURGLARY, FIRE & EXPLOSION-RESISTANT PROTECTION



KEY FEATURES

- Burglary resistance in accordance with the updated and more stringent European standard, EN 1143-1:2019 T2, as certified by ECB•S for Grade IV T2 to VI T2.
- Tested by an independent, ISO 17025 accredited laboratory according to the NT Fire 017 – 60 Paper standard with certification managed by ECB•S. Protects your vital documents from the affects of fire.
- Protection against explosives in Grade IV T2 EX to VI T2 EX. Certified by ECB•S in accordance with the stringent European standard, EN 1143-1:2019.
- Optional Core Drill (CD) resistance in accordance with the stringent European standard EN 1143-1:2019 T2, certified by ECB•S for Grade IV T2 CD to VI T2 CD. This is an industry first, whilst at the same time retaining fire protection.
- Optional Planar Protection is a fully integrated, alarm wiring matrix within the safe body. Designed to be connected up to existing in-situ security systems.
- Supplied with two locks as standard with the option of a factory fitted electronic lock.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) Gr. IV,V/VI | External Width (mm) Gr. IV,V/VI | External Depth (mm) Gr. IV,V/VI | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) Gr. IV/V/VI | Net Weight with CD (kg) Gr. IV/V/VI | No. of Shelves |
|--------|-------------------------------------|------------------------------------|------------------------------------|----------------------|---------------------|---------------------|-------------------|--------------------------------|--|----------------|
| M-95 | 974/994 | 574/594 | 584/604 | 790 | 390 | 303 | 95 | 702/751/824 | 729/776/849 | 2 |
| M-245 | 974/994 | 824/844 | 764/784 | 790 | 640 | 483 | 245 | 1084/1175/1283 | 1128/1219/1327 | 2 |
| M-405 | 1494/1514 | 824/844 | 764/784 | 1310 | 640 | 483 | 405 | 1525/1662/1834 | 1594/1728/1900 | 3 |
| M-520 | 1874/1894 | 824/844 | 764/787 | 1690 | 640 | 483 | 520 | 1849/2025/2201 | 1937/2103/2279 | 4 |
| M-885 | 1874/1894 | 1274/1294 | 764/784 | 1690 | 1090 | 483 | 885 | 2648/2885/3164 | 2780/2993/3272 | 4 |
| M-1090 | 1874/1894 | 1524/1544 | 764/784 | 1690 | 1340 | 483 | 1090 | 3026/3316/3625 | 3178/3445/3754 | 4 |

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 51

CD=Core Drill. External dimensions exclude handle and hinge projections. In line with certification, weights can vary by +/- 5%.



MODEL SHOWN: SIGMA DEPOSIT M-30

SIGMA DEPOSIT

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Protects organisations from opportunist attacks.
- Ideal for receiving small deposits of cash during business and non-business hours without the need to open the main door.
- Securely holds cash without the need for the safes to be opened.
- Ensures that large quantities of money do not accumulate in the cash till.
- Laser-cut door made of 8 mm plate steel.
- Body made from 3 mm steel.
- 25mm diameter steel locking bolts.
- Shelf supplied in model 50.
- Sigma Free Standing Deposit Safes come with two lock options:
 - Double-bitted 8-lever key lock.
 - A programmable electronic lock (available for M-40 and M-50).
- An anchoring kit is supplied so the safe can be securely base- or rear-fixed, preventing unauthorised removal once installed.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) |
|-------|----------------------|---------------------|---------------------|----------------------|---------------------|---------------------|-------------------|-----------------|
| M-30 | 305 | 375 | 350 | 299 | 369 | 289 | 32 | 27 |
| M-40 | 375 | 375 | 350 | 369 | 369 | 289 | 39 | 33 |
| M-50 | 475 | 375 | 350 | 469 | 369 | 289 | 50 | 38 |

External dimensions exclude handle and hinge projections. Weights can vary by +/- 5%. Deposit Slot measures 170mm wide x 16mm high.



MODEL SHOWN: OMEGA DEPOSIT M-50

OMEGA DEPOSIT

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Protects organisations from opportunist attacks.
- Ideal for retail outlets operating remotely from central areas and in multi-shift or out-of-hours environments where key holders are not always available.
- Securely holds cash without the need for the safes to be opened.
- Ensures that large quantities of money do not accumulate in the cash till.
- Door is made from 10mm steel.
- Body is made from 6mm steel.
- 20mm diameter steel bolts secure the door.
- Door bolts operate in three directions.
- An anti-fishing device prevents deposits from being removed once deposited into the deposit chute.
- Shelf supplied with model 50.
- Omega Deposit comes with three lock options:
 - Double-bitted 8-lever key lock.
 - A programmable multi-user electronic lock with optional dual control.
 - Electronic lock complete with a double bitted, emergency override key.
- An anchoring kit is supplied so the safe can be securely base- or rear-fixed, preventing unauthorised removal once installed.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) |
|-------|----------------------|---------------------|---------------------|----------------------|---------------------|---------------------|-------------------|-----------------|
| M-25 | 455 | 340 | 380 | 212 | 328 | 308 | 24 | 54 |
| M-50 | 698 | 340 | 380 | 455 | 328 | 308 | 48 | 75 |

External dimensions exclude handle and hinge projections. Weights can vary by +/- 5%. Deposit opening measures 80mm high x 265mm wide x 220mm deep.



MODEL SHOWN: RHINO MK II DT M-75

RHINO MK II DT



BURGLARY & FIRE-RESISTANT PROTECTION

KEY FEATURES

- Designed for retail and commercial use.
- 65mm barrier thickness made of a high-density monolithic casting contained within inner and outer steel casings.
- Solid composite 35mm thick main door is combined with additional protection plates to protect crucial locking areas. Solid steel 28.5 mm diameter moving bolts attach the door to the body, while fixed "anti-heeling" bolts on the door's rear edge protect the hinge side.
- Deposit drawer with solid 10mm steel plate front combined with an internal anti-fishing mechanism to secure all items deposited.
- Main door secured by EN 1300 Class A primary locks which can be single lock, be it a key lock, manual combination or electronic lock depending upon individual requirements. For additional security, a second lock is possible.
- Drawer deposit unit secured by a single EN 1300-certified Class A lock.
- Two security fixing bolts to ensure it can be firmly fixed to the floor when installed.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) |
|-------|----------------------|---------------------|---------------------|----------------------|---------------------|---------------------|-------------------|-----------------|
| M-40 | 654 | 500 | 501 | 270 | 370 | 320 | 40 | 256 |
| M-55 | 854 | 500 | 501 | 470 | 370 | 320 | 56 | 330 |
| M-75 | 1004 | 500 | 501 | 620 | 370 | 320 | 73 | 353 |
| M-130 | 1004 | 630 | 601 | 620 | 500 | 420 | 130 | 453 |
| M-180 | 1234 | 630 | 601 | 850 | 500 | 420 | 179 | 533 |

External dimensions exclude handle and hinge projections. Weights can vary by +/- 5%.



MODEL SHOWN: EUROPA DEPOSIT M-180

EUROPA DEPOSIT



BURGLARY-RESISTANT PROTECTION

KEY FEATURES

- High quality deposit safe constructed from modern high specification materials.
- Deposit feature allows multiple users to constantly deposit cash and valuables securely whilst the main body of the safe remains locked.
- Can be customised with various locking options to suit your requirements.
- Optional internal fittings available: retaining shelf and retaining cupboard.
- Deposit drawer is secured by a double bitted key lock.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth* (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Volume** (litres) | Weight (kg) | No. of Standard Key Locks |
|-------------|----------------------|---------------------|----------------------|----------------------|---------------------|---------------------|-------------------|-------------|---------------------------|
| M-60, GI | 882 | 528 | 603 | 460 | 360 | 360 | 60 | 525 | 1 |
| M-115, GI | 972 | 668 | 663 | 550 | 500 | 420 | 116 | 694 | 1 |
| M-180, GI | 1272 | 668 | 663 | 850 | 500 | 420 | 180 | 852 | 1 |
| M-115, GIII | 972 | 668 | 663 | 550 | 500 | 420 | 116 | 754 | 2 |
| M-180, GIII | 1272 | 668 | 663 | 850 | 500 | 420 | 180 | 918 | 2 |
| M-140, CV | 972 | 668 | 663 | 588 | 538 | 444 | 140 | 798 | 2 |
| M-210, CV | 1272 | 668 | 663 | 888 | 538 | 444 | 212 | 1052 | 2 |

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 51


*Projection of handle (56mm) not included. **Internal volume does not include allowance for anti-fishing devices. External dimensions exclude handle and hinge projections. Weights can vary by +/- 5%.



MODEL SHOWN: PROGUARD DT M-45

PROGUARD DT

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Certified, tested and approved in accordance with the European EN 1143-2 standard, in Grades DI and DII.
- EN 1143-2 certified meaning that insurance ratings are not affected by the additional deposit function.
- Constructed using a new composite material designed for strength and reduction in total weight, keeping transportation and installation costs to a minimum.
- Solid steel three-way boltwork.
- Anti-fishing device to prevent anyone reaching the contents through the drawer.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to resist burglary attempts.
- A Class A mechanical key lock or a Class B electronic lock, approved in accordance with EN 1300, available as primary lock options. Electronic locks increase the level of security and prevent unauthorised access.
- Drawer trap fitted with a Class A key lock as standard but alternatives are available upon request.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Net Weight (kg) Gr I | Net Weight (kg) Gr II | Capacity* (litres) | Drawer Width (mm) | Drawer Depth (mm) |
|-------|----------------------|---------------------|---------------------|----------------------|---------------------|---------------------|----------------------|-----------------------|--------------------|-------------------|-------------------|
| M-45 | 687 | 500 | 521 | 314 | 400 | 360 | 162 | 302 | 45 | 350 | 230 |
| M-90 | 847 | 600 | 561 | 474 | 500 | 386 | 218 | 426 | 91 | 450 | 230 |
| M-125 | 1052 | 600 | 561 | 659 | 500 | 386 | 242 | 499 | 127 | 450 | 230 |
| M-180 | 1307 | 600 | 561 | 934 | 500 | 386 | 290 | 602 | 180 | 450 | 230 |


External dimensions exclude handle and hinge projections. Weights can vary by +/- 5%. * Useable volume below deposit and anti-fishing device.



MODEL SHOWN: EXECUTIVE M-40

EXECUTIVE

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Fire can strike anywhere – the office or the home. Executive Cabinets provide peace of mind: in the event of a fire breaking out, you can be sure that your paper work can be recovered in a usable condition.
- Ideal for storing essential documents such as wills, property deeds, contracts, insurance policies and many more.
- Certified by both RISE (NT Fire 017 – 60 Paper) and UL (UL Class 350 1hr) for 60 minutes' fire resistance.
- Overall body thickness of 50mm, comprising an inner and outer steel body containing a specially formulated fire-resistant solid barrier material.
- Models come with a choice of two lock options – A cylinder lock utilising a secure flat profile key.
- Programmable and user-friendly electronic lock.
- Overall door thickness of 66mm.
- An anchoring kit is supplied which allows the safe to be securely base-fixed, preventing unauthorised removal.
- Comes with internal fittings as standard, meaning that the unit is ready for use as soon as it is received.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) | No. of Trays | No. of Shelves |
|-------|----------------------|---------------------|---------------------|----------------------|---------------------|---------------------|-------------------|-----------------|--------------|----------------|
| M-15 | 300 | 390 | 320 | 210 | 310 | 215 | 14 | 25 | 1 | 0 |
| M-25 | 345 | 425 | 450 | 240 | 320 | 320 | 25 | 45 | 1 | 0 |
| M-40 | 525 | 410 | 450 | 415 | 305 | 320 | 41 | 57 | 1 | 1 |
| M-70 | 670 | 550 | 510 | 515 | 395 | 340 | 71 | 120 | 0 | 2 |

External dimensions exclude handle and hinge projections. In line with certification, weights can vary by +/- 5%.



* MODEL SHOWN: DPC M-400P

DPC

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- High capacity storage solution with fire protection, ideal for office environments such as banks and financial institutions.
- Certified by Underwriter's Laboratories according to UL 72 Class 350 for up to 120 minutes fire protection.
- Automatic mechanism to ensure bolts are in place and able to resist fire whenever the door is closed.
- Interlocking door system on double door models to prevent the cabinet from being left open.
- Available in six high-capacity sizes from 160 to 670 litres.
- EN 1300 Class A certified key lock fitted as standard.
- Dual locking or single electronic or manual combination locks available at additional costs.
- Anchoring kit to fix the safe on the floor and prevent from unauthorised removal available on request.
- Shelf/shelves supplied as standard.
- Optional internal fittings available including pull out file frames and lockable drawers and cupboards.
- RAL 7035 body & RAL 7016 facia panel.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width* (mm) | External Depth** (mm) | Internal Height (mm) | Internal Width*** (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) | No. of Shelves | No. of Doors |
|--------|----------------------|----------------------|-----------------------|----------------------|------------------------|---------------------|-------------------|-----------------|----------------|--------------|
| M-160 | 859 | 759 | 551 | 700 | 600 | 382 | 160 | 235 | 1 | 1 |
| M-240 | 1209 | 759 | 551 | 1050 | 600 | 382 | 240 | 315 | 2 | 1 |
| M-400L | 1209 | 1160 | 551 | 1050 | 1000 | 382 | 401 | 500 | 2 | 2 |
| M-320 | 1559 | 759 | 551 | 1400 | 600 | 382 | 321 | 395 | 3 | 1 |
| M-400P | 1909 | 759 | 551 | 1750 | 600 | 382 | 401 | 470 | 4 | 1 |
| M-670 | 1909 | 1160 | 551 | 1750 | 1000 | 382 | 670 | 650 | 4 | 2 |

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 51

*Projection of hinge (27mm) not included. **Projection of handle (54mm) not included. ***Width excluding shelf racking strips. Racking reduces the internal width by 10mm



MODEL SHOWN: 6000 SERIES FILES, SIZE 6425

6000 SERIES FILES

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Cost effective, certified protection for files and documents.
- Certified according to EN 15659 LFS 60 P.
- Designed to take most suspension files.
- Available in two or four drawer versions.
- Easy-to-operate day catch to secure the drawers when closed.
- Units do not have to be locked to provide fire protection but just to be pushed closed.
- Fitted with one key lock controlling all drawers as standard.
- The option of dual locking, combination and key lock is available.
- Additional drawers may be individually locked by a key lock if desired.
- Light Grey RAL 7035, powder-coated finish and modern design which blends nicely into any office environment.
- Manufactured in accordance with ISO 9001 for quality management systems and ISO 14001 for environmental management systems.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Drawer Height (mm) | Drawer Width (mm) | Drawer Depth (mm) | Net Weight (kg) |
|-------|----------------------|---------------------|---------------------|--------------------|-------------------|-------------------|-----------------|
| 6225 | 737 | 544 | 634 | 292 | 385 | 476 | 142 |
| 6425 | 1408 | 544 | 634 | 292 | 385 | 476 | 250 |
| 6230 | 737 | 544 | 776 | 292 | 385 | 633 | 165 |
| 6430 | 1408 | 544 | 776 | 292 | 385 | 633 | 306 |

External dimensions exclude handle and hinge projections. In line with certification, weights can vary by +/- 5%.



MODEL SHOWN: FIRE FILE 25" M-210

FIRE FILE 25"

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Certified for one hour's fire protection of documents in accordance with UL Standard 72, Class 350 Endurance.
- Maximised capacity that users can take full advantage of for their storage requirements.
- Chubb Safes' Fire File 25" is available in two- or four-drawer versions.
- Easy-to-operate day catch to secure the drawers when closed.
- Units do not have to be locked to provide fire protection: they just have to be pushed closed.
- High-quality steel sliders to ensure comfortable operation and full drawer access.
- Lighter weight construction which means smoother transportation and installation.
- All models fitted with high-security locks as standard.
- Light Grey RAL 7035, powder-coated finish and modern design which blends nicely into any office environment.
- Chubb Safes' Fire File 25" is manufactured in accordance with ISO 9001 for quality management systems and ISO 14001 for environmental management systems.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) | No. of Drawers |
|-------|----------------------|---------------------|---------------------|----------------------|---------------------|---------------------|-------------------|-----------------|----------------|
| M-105 | 784 | 551 | 635 | 290 | 387 | 460 | 104 | 164 | 2 |
| M-210 | 1510 | 551 | 635 | 290 | 387 | 460 | 208 | 291 | 4 |

External dimensions exclude handle projections. In line with certification, weights can vary by +/- 5%.



FIRE FILE 31"

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Certified according with UL standard 72 in Class 350 Endurance for both 1 hour and 2 hour duration.
- Available in two-, three- or four-drawer versions.
- On the two-hour certified models, each drawer is fire-protected. Even if one of the drawers is accidentally left open, the other closed drawers are still protected by the built in fire resistance partitions.
- Easy-to-operate day catch to secure the drawers when closed. Units do not have to be locked to provide fire protection but just to be pushed closed.
- High-quality steel sliders to ensure comfortable operation and full drawer access.
- Lighter weight construction which means smoother transportation and installation.
- Fitted with high-security locks as standard.
- Light Grey RAL 7035, powder-coated finish and modern design.
- Manufactured in accordance with ISO 9001 for quality management systems and ISO 14001 for environmental management systems.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Drawer Height (mm) | Drawer Width (mm) | Drawer Depth (mm) | Capacity (litres) | Net Weight (kg) 1h / 2h | No. of Drawers |
|-------|----------------------|---------------------|---------------------|--------------------|-------------------|-------------------|-------------------|-------------------------|----------------|
| M-135 | 784 | 551 | 779 | 290 | 387 | 604 | 136 | 194 / 197 | 2 |
| M-205 | 1147 | 551 | 779 | 290 | 387 | 604 | 204 | 268 / 273 | 3 |
| M-270 | 1510 | 551 | 779 | 290 | 387 | 604 | 272 | 321 / 328 | 4 |

External dimensions exclude handle projections. In line with certification, weights can vary by +/- 5%.



MODEL SHOWN: LATERAL FIRE FILE M-360

LATERAL FIRE FILE

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Certified by UL Underwriters Laboratories) to Class 350 Endurance 1 hour in accordance with Standard 72.
- Perfectly designed for today's modern offices, it sits closer to the wall for marginally more filing than traditional large filing cabinets, offering exceptional functionality and optimised storage.
- Maximised storage capacity with 3 or 4 drawers so users can fully meet their storage requirements.
- Easy-to-operate day catch to secure the drawers when closed.
- Units do not have to be locked to provide fire protection: they simply need to be pushed closed.
- High-quality steel sliders to ensure comfortable operation and full drawer access.
- Low-weight for reduced transportation and installation costs, and lighter floor loads.
- All models fitted with high-security locks as standard.
- Light Grey RAL 7035, powder-coated finish and modern design which blends nicely into any office environment.
- Manufactured in accordance with ISO 9001 for quality management systems and ISO 14001 for environmental management systems.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Drawer Height (mm) | Drawer Width (mm) | Drawer Depth (mm) | Capacity (litres) | Net Weight (kg) | No. of Drawers |
|-------|----------------------|---------------------|---------------------|--------------------|-------------------|-------------------|-------------------|-----------------|----------------|
| M-270 | 1147 | 964 | 586 | 290 | 800 | 387 | 270 | 328 | 3 |
| M-360 | 1510 | 964 | 586 | 290 | 800 | 387 | 359 | 411 | 4 |

External dimensions exclude handle projections. In line with certification, weights can vary by +/- 5%.



MODEL SHOWN: BINDER FIRE FILE M-160

BINDER FIRE FILE

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Certified UL Class 350 Endurance protection by UL for up to two hours.
- Maximised storage capacity that allows users to gain full advantage for their storage requirements. Available with 3 or 4 drawers and each drawer holds up to 40 A4 DIN 33mm binders, hence 120 and 160 binders in the three drawer and four drawer versions respectively. By comparison, a standard free standing cabinet with five levels of storage each of 1m length can only hold 150 such binders. Thus the Chubb's Binder Fire Files are the perfect storage solution for the congested offices.
- Insulation between drawers means each drawer's contents are protected in an event of fire if one drawer is left open.
- Easy operable day catch to secure the drawers when closed. Units do not have to be locked to provide fire protection but just be pushed closed.
- High-quality steel sliders to ensure comfortable operation and full drawer access.
- Low-weight cabinets for reduced transportation and installation costs, and lighter floor loads.
- All models fitted with high-security locks as standard.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Drawer Height (mm) | Drawer Width (mm) | Drawer Depth (mm) | Net Weight (kg) | Capacity (A4 Binders) | No. of Drawers |
|-------|----------------------|---------------------|---------------------|--------------------|-------------------|-------------------|-----------------|-----------------------|----------------|
| M-120 | 1276 | 801 | 836 | 333 | 637 | 660 | 402 | 120 | 3 |
| M-160 | 1682 | 801 | 836 | 333 | 637 | 660 | 495 | 160 | 4 |

External dimensions exclude handle projections. In line with certification, weights can vary by +/- 5%.



MODEL SHOWN: ULTRA FIRE FILE 31" M-270

ULTRA FIRE FILE 31"

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Certified in accordance with UL Standard 72 in Class 350 Endurance and Impact for both 1-hour and 2-hour durations, providing ultimate peace of mind for mission-critical paper records.
- A shock absorbing plinth provides maximum impact absorption in the event of a floor collapse in a building fire.
- In two-hour certified models, each drawer is individually protected from fire. Even if one of the drawers is accidentally left open, the other closed drawers are still protected.
- Maximised capacity for optimized storage.
- Extended drawers give full access.
- It is available in two-, three- or four-drawer versions.
- Easy-to-operate day catch to secure the drawers when closed.
- Units do not have to be locked to provide fire protection but just to be pushed closed.
- Lighter weight construction, means easier transportation and installation.
- Fitted with high-security locks as standard.
- Light Grey RAL 7035, powder-coated finish and modern design which blends nicely into any office environment.
- Manufactured in accordance with ISO 9001 for quality management systems and ISO 14001 for environmental management systems.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Drawer Height (mm) | Drawer Width (mm) | Drawer Depth (mm) | Capacity (liters) | Net Weight (kg) 1h / 2h | No. of Drawers |
|-------|----------------------|---------------------|---------------------|--------------------|-------------------|-------------------|-------------------|-------------------------|----------------|
| M-135 | 869 | 551 | 779 | 290 | 387 | 604 | 136 | 201 / 204 | 2 |
| M-205 | 1222 | 551 | 779 | 290 | 387 | 604 | 204 | 275 / 280 | 3 |
| M-270 | 1585 | 551 | 779 | 290 | 387 | 604 | 272 | 328 / 335 | 4 |

External dimensions exclude handle projections. In line with certification, weights can vary by +/- 5%.



MODEL SHOWN: DATAGUARD NT M-130

DATAGUARD NT

FIRE-RESISTANT DATA MEDIA PROTECTION



KEY FEATURES

- Certified NT Fire 017 – 120 Diskette for two-hour protection of data media from fire.
- Single-door safe with no insert required – maximising internal capacity and up to 60% more storage space than other safes in the same class.
- User-friendly, slam-action door. When shut, provides full fire protection without needing to be locked.
- Adjustable shelving and drawer units supplied as standard.
- Available in four models, ranging from 30 to 128 litres.
- Choice of key or electronic locking.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Volume (litres) | Net Weight (kg) | Number of shelves | Number of drawers |
|-------|----------------------|---------------------|---------------------|----------------------|---------------------|---------------------|-----------------|-----------------|-------------------|-------------------|
| M-30 | 530 | 546 | 566 | 280 | 346 | 306 | 30 | 145 | 1 | 0 |
| M-50 | 700 | 546 | 566 | 450 | 346 | 306 | 48 | 190 | 1 | 1 |
| M-90 | 1025 | 546 | 590 | 775 | 346 | 330 | 89 | 263 | 1 | 2 |
| M-130 | 1025 | 702 | 590 | 775 | 502 | 330 | 128 | 330 | 1 | 2 |

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 51

External heights and depths include plinth and handle projection. Internal heights and widths are also equal to the clear opening measurements.



AIR HOTEL

BURGLARY PROTECTION FOR YOUR VALUABLES



KEY FEATURES

- Compact safe for hotel rooms, student accommodation or other locations with frequent occupancy turnover.
- Steel door and body with dual, plated steel moving boltwork.
- User-friendly electronic lock.
- Authorised control and access via electronic lock or optional hand-held programming unit.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth* (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) |
|-------|----------------------|---------------------|----------------------|----------------------|---------------------|---------------------|-------------------|-----------------|
| M-25 | 200 | 430 | 350 | 190 | 420 | 300 | 24 | 12 |

*Lock projection (10mm) not included.



MODEL SHOWN: AIR M-10

AIR

BURGLARY PROTECTION FOR YOUR VALUABLES



KEY FEATURES

- Compact safe for the home, hotel room or office.
- Three models available: 9-, 16- and 24-litres capacities. The largest is designed to accommodate most laptop computers.
- Choice of locking options: available with a double-bitted key lock or an electronic lock with a programmable code.
- Emergency key override facility for the electronic lock should battery power ever fail.
- Patented “anti-bump” technology which affords the electronic lock protection against impact attacks.
- Tamper-evident keypad.
- Ready for base and for rear fixing, supplied with four expansion anchors.
- Inner base carpet.
- Key hooks included on all electronic models.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth* (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) | No. of Shelves |
|-------|----------------------|---------------------|----------------------|----------------------|---------------------|---------------------|-------------------|-----------------|----------------|
| M-10 | 200 | 310 | 200 | 190 | 300 | 150 | 9 | 6 | 0 |
| M-15 | 250 | 350 | 250 | 240 | 340 | 200 | 16 | 9 | 1 |
| M-25 | 200 | 430 | 350 | 190 | 420 | 300 | 24 | 11 | 0 |

* In electronic models, add 20mm to allow for keypad projection.



MODEL SHOWN: REGAL M-120 FOREST SERIES



REGAL

LUXURY BURGLARY-RESISTANT PROTECTION

KEY FEATURES

An exclusive selection of two series, each beautifully crafted with handpicked colours and luxurious materials:

- The Forest series: Features a green exterior, a PU leather and velvet-lined interior with PU leather detailing on the inside of the door, and brass-finished hardware accents.
- The Ocean series: Features a blue exterior, a PU leather and velvet-lined interior with a unique acrylic design on the inside of the door, and silver-finished hardware accents.

- The Basic internal fitting layout includes two drawers and a shelf, while the Premium internal fitting layout builds on this by adding watch winders and additional drawers.
- Choose between the compact M-110 and the larger M-215.
- Equipped with an ergonomically designed handle. High-quality EN 1300-certified electronic lock. Lock may differ from that shown.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Width incl. Hinge (mm) | External Depth (mm) | External Depth incl. Lock (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Net Weight (kg) |
|-------|----------------------|---------------------|---------------------------------|---------------------|--------------------------------|----------------------|---------------------|---------------------|-----------------|
| M-110 | 1000 | 510 | 534 | 388 | 450 | 930 | 450 | 260 | 231 |
| M-215 | 1200 | 580 | 604 | 498 | 560 | 1130 | 520 | 370 | 320 |

In line with certification, weights can vary by +/- 5%.



MODEL SHOWN: ALPHAPLUS M-65

ALPHAPLUS

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Double-skinned safe for securing cash, jewellery and valuables around the home or at the office.
- Filled with a fire-retardant mineral wool.
- Can be easily installed in the home without specialised tools.
- Four models available ranging from just 3- to 64-litre capacity.
- Choice of locking options: available with a double-bitted key lock or a touch-screen electronic lock with programmable code.
- Audible anti-tamper alarm installed on all electronic locking models.
- Internal LED lighting on all electronic locking models.
- Electronic models all feature motorised open/closing.
- External emergency power connection should battery power fail.
- Emergency key override facility in the unlikely event of total electronic failure.
- Tamper-evident keypad.
- Ready for base and or rear fixing, supplied with four expansion anchors.
- Inner base carpet.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth* (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) | No. of Shelves |
|-------|----------------------|---------------------|----------------------|----------------------|---------------------|---------------------|-------------------|-----------------|----------------|
| M-05 | 180 | 310 | 205 | 110 | 240 | 115 | 3 | 12 | 1 |
| M-15 | 270 | 350 | 345 | 200 | 280 | 255 | 14 | 22 | 1 |
| M-30 | 320 | 440 | 395 | 250 | 370 | 305 | 28 | 32 | 1 |
| M-65 | 610 | 460 | 395 | 540 | 390 | 305 | 64 | 53 | 1 |

* In electronic models, add 25mm to allow for keypad projection.



MODEL SHOWN: HOMESTAR M-15

HOMESTAR

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Suitable for the storage of valuables such as jewellery, cameras and other valuable items.
- Certified by Sold Secure to Domestic Safes Silver Level.
- Electronic lock with external emergency power connection.
- LED internal light.
- Base or rear fixing available.
- 6mm steel door and 3mm steel body.
- Three sizes available.
- One removable shelf as standard.
- Flock lining on shelf.
- Anti-tamper alarm.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth* (mm) | Internal Height (mm) | Internal Width** (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) | No. of Shelves |
|---------|----------------------|---------------------|----------------------|----------------------|-----------------------|---------------------|-------------------|-----------------|----------------|
| M-15 | 250 | 350 | 250 | 244 | 344 | 200 | 17 | 17 | 1 |
| M-30*** | 200 | 450 | 400 | 194 | 444 | 350 | 30 | 24 | 1 |
| M-55 | 400 | 400 | 400 | 394 | 394 | 350 | 54 | 32 | 1 |


*Projection of electronic lock (15mm) not included **Width excluding shelf supports. Shelf supports reduce the internal width by 30mm ***For Laptop



MODEL SHOWN: FORTIS M-70

FORTIS

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Available in a range of sizes from 35 to 90 litres, suitable for most requirements.
- Designed to be base anchored to resist removal.
- Choice of a traditional key lock or an automatic locking, user friendly electronic lock.
- Magnetic, repositionable and USB rechargeable LED light.
- Chubb safes' three spoke handle provides visual open or locked condition when used with the factory fitted electronic lock option.
- Adjustable shelves using internal racking location holes maximizing internal width.
- Cork backed mat embossed with Chubb safes logo.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Width With Door Open 180° (mm) | Depth With Door Open 90° (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) | No. of Shelves |
|-------|----------------------|---------------------|---------------------|--------------------------------|-------------------------------|----------------------|---------------------|---------------------|-------------------|-----------------|----------------|
| 35 | 450 | 445 | 400 | 837 | 815 | 360 | 355 | 291 | 36 | 64 | 1 |
| 50 | 600 | 445 | 400 | 837 | 815 | 510 | 355 | 291 | 51 | 79 | 1 |
| 70 | 800 | 445 | 400 | 837 | 815 | 710 | 355 | 291 | 71 | 100 | 2 |
| 90 | 1000 | 445 | 400 | 837 | 815 | 910 | 355 | 291 | 91 | 120 | 3 |

Door furniture projects 30mm beyond the body depth. In line with certification, weights can vary by +/- 5%



MODEL SHOWN: HOMESAFE S2 30P M-50

HOMESAFE S2 30P

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Combined fire and burglary protection in one product.
- EN 14450 certified by ECB•S to level S2 burglary protection.
- EN 15659 certified by ECB•S for 30-minutes' fire protection for documents.
- Choice of 6 models: from 11- to 91-litre capacity.
- Choice of locking options in all models: EN 1300 certified double-bitted key lock or EN 1300 certified electronic lock.
- Dual base fixing holes, supplied with two concrete anchor bolts.
- Ideal solution for protecting cash and valuable items, as well as passports, title deeds and other important documents in the home and office.
- The cabinet's door is secured using the new revolutionary "V" bolt system. The design of the locking bolts helps maintain door integrity both when under physical attack and during a fire.
- The secure cabinet is prepared & anchoring kit is supplied to allow the HomeSafe S2 30P range to be securely base- or rear-fixed to resist unauthorised removal once installed.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) | No. of Shelves |
|-------|----------------------|---------------------|---------------------|----------------------|---------------------|---------------------|-------------------|-----------------|----------------|
| M-10 | 300 | 360 | 300 | 210 | 270 | 191 | 11 | 24 | 1 |
| M-20 | 300 | 445 | 390 | 210 | 355 | 281 | 21 | 32 | 1 |
| M-35 | 450 | 445 | 390 | 360 | 355 | 281 | 36 | 42 | 1 |
| M-50 | 600 | 445 | 390 | 510 | 355 | 281 | 51 | 53 | 1 |
| M-70 | 800 | 445 | 390 | 710 | 355 | 281 | 71 | 65 | 2 |
| M-90 | 1000 | 445 | 390 | 910 | 355 | 281 | 91 | 78 | 2 |

Hinges project 20mm beyond the depth given above. In standard electronic models, the overall projection increases to 30mm.



MODEL SHOWN: VIPER M-50

VIPER

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Combined fire and burglary protection in one product.
- EN 14450 certified by ECB•S to level S2 burglary protection.
- EN 15659 certified by ECB•S for 30-minutes' fire protection for documents.
- Choice of 6 models: from 11- to 91-litre capacity.
- Choice of locking options in all models: EN 1300 certified double-bitted key lock or EN 1300 certified electronic lock.
- Dual base fixing holes, supplied with two concrete anchor bolts.
- Ideal solution for protecting cash and valuable items, as well as passports, title deeds and other important documents in the home and office.
- The cabinet's door is secured using the new revolutionary "V" bolt system. The design of the locking bolts helps maintain door integrity both when under physical attack and during a fire.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) | No. of Shelves |
|-------|----------------------|---------------------|---------------------|----------------------|---------------------|---------------------|-------------------|-----------------|----------------|
| M-10 | 300 | 360 | 300 | 210 | 270 | 191 | 11 | 24 | 1 |
| M-20 | 300 | 445 | 390 | 210 | 355 | 281 | 21 | 32 | 1 |
| M-35 | 450 | 445 | 390 | 360 | 355 | 281 | 36 | 42 | 1 |
| M-50 | 600 | 445 | 390 | 510 | 355 | 281 | 51 | 53 | 1 |
| M-70 | 800 | 445 | 390 | 710 | 355 | 281 | 71 | 65 | 2 |
| M-90 | 1000 | 445 | 390 | 910 | 355 | 281 | 91 | 78 | 2 |

Hinges project 20mm beyond the depth given above. In standard electronic models, the overall projection increases to 30mm.



MODEL SHOWN: RHINO MK II M-180

RHINO MK II

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Body barrier thickness of 65mm; constructed from steel, welded throughout and filled with specially formulated Chubb safes barrier material.
- A solid composite 35mm thick door is combined with additional protection plates for crucial locking areas.
- Solid steel moving bolts with a 28.5mm diameter affix the door to the body, while fixed “anti-heeling” bolts on both front and rear edges protect the door from prying attack.
- A Polyurethane base paint finish is used to coat the body and door. The paint is both scratch resistant and durable.
- Tested in accordance with EN 14450 Level S2, certified by ECB•S.
- Rhino Mk II has been tested in accordance with EN 15659, and is certified to level LFS 60 P by ECB•S giving 1 hour fire protection.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth* (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Volume (litres) | Net Weight** (kg) |
|-------|----------------------|---------------------|----------------------|----------------------|---------------------|---------------------|-----------------|-------------------|
| M-30 | 400 | 500 | 502 | 270 | 370 | 325 | 32 | 158 |
| M-55 | 600 | 500 | 502 | 470 | 370 | 325 | 57 | 213 |
| M-75 | 750 | 500 | 502 | 620 | 370 | 325 | 75 | 255 |
| M-130 | 750 | 630 | 602 | 620 | 500 | 425 | 132 | 341 |
| M-180 | 980 | 630 | 602 | 850 | 500 | 425 | 181 | 421 |

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 51

* Handle projection is 56mm. ** In line with certification, weights can vary by +/- 5%



MODEL SHOWN: MINI BANKER MK II, SIZE 4

MINI BANKER MK II

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Body barrier thickness of 65mm; constructed from steel, welded throughout and filled with specially formulated Chubb safes barrier material.
- A solid composite 35mm thick door is combined with additional protection plates for crucial locking areas.
- Solid steel moving bolts with a 28.5mm diameter affix the door to the body, while fixed “anti-heeling” bolts on both front and rear edges protect the door from prying attack.
- Glass relocker to ensure bolts to remain firmly in place should an attack on the lock occur (featured on model 2 and above).
- A Polyurethane base paint finish is used to coat the body and door. The paint is both scratch resistant and durable
- Tested in accordance with EN 14450 Level S2, certified by ECB•S.
- Fire Resistance tested in accordance to the Japanese Industrial Standard JIS S 1037 with fire resistance for up to 60 minutes.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth* (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight** (kg) | No. of Shelves | No. of Drawers |
|-------|----------------------|---------------------|----------------------|----------------------|---------------------|---------------------|-------------------|-------------------|----------------|----------------|
| 1 | 410 | 360 | 386 | 280 | 230 | 205 | 13 | 104 | 1 | 0 |
| 2 | 488 | 435 | 461 | 358 | 305 | 280 | 31 | 157 | 1 | 1 |
| 3 | 590 | 435 | 461 | 460 | 305 | 280 | 39 | 180 | 1 | 1 |
| 4 | 590 | 550 | 576 | 460 | 420 | 395 | 76 | 257 | 1 | 1 |
| 5 | 717 | 550 | 576 | 587 | 420 | 395 | 97 | 293 | 1 | 1 |
| 6 | 894 | 550 | 576 | 764 | 420 | 395 | 127 | 347 | 1 | 1 |
| 7 | 1047 | 640 | 666 | 917 | 510 | 485 | 227 | 481 | 1 | 1 |

* Handle projection is 56mm. ** In line with certification, weights can vary by +/- 5%



MODEL SHOWN: ARCHIVE CABINET M-450

ARCHIVE CABINET

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Archive Cabinet has a steel, double-wall construction insulated with special fire-resistant barrier material.
- Available in four models with a generous storage capacity ranging from 325 to 880 litres.
- Secured by three-way boltwork, locking at the top, bottom and side of the door.
- EN 1300 Class A certified key lock fitted as standard.
- A wide range of flexible fittings available to suit all types of storage requirements, including removable shelves, extendable file frames for A4 or Folio files and a lockable compartment.
- Anchor points in the base allow the cabinet to be fixed to the floor.
- All cabinets have a light-grey, powder-coated finish, suitable for any office space.

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth* (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) | No. Of Shelves |
|-------|----------------------|---------------------|----------------------|----------------------|---------------------|---------------------|-------------------|-----------------|----------------|
| M-325 | 1500 | 700 | 550 | 1290 | 594 | 430 | 325 | 95 | 3 |
| M-450 | 1950 | 700 | 550 | 1780 | 594 | 430 | 450 | 120 | 4 |
| M-640 | 1950 | 950 | 550 | 1780 | 844 | 430 | 640 | 150 | 4 |
| M-880 | 1950 | 1260 | 550 | 1780 | 1154 | 430 | 880 | 200 | 4 |

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 51

*Projection of handle (50mm) not included.



FORCEGUARD

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Available in four models, from 236 to 920 litres, with double doors on models M-535–M-920.
- Single-wall body and door made from 3mm solid steel. Doors have a total thickness of 52mm and open to 180°.
- Secured by three-way boltwork, locking at the top, bottom and side of the door. All bolts are chrome-plated and 20mm in diameter.
- Doors also fitted with relocking device for additional protection against attempted forced entry.
- Key lock (Class A), combination lock (class B) or electronic lock (class B) fitted as standard. All locks approved in accordance with the European EN 1300 standard.
- All models equipped with removable shelves designed to accommodate hanging files.
- Anchor points in the base allow the cabinet to be fixed to the floor.
- All cabinets have a light-grey, powder-coated finish, suitable for any office space (RAL 7035).

PRODUCT SPECIFICATIONS

| Model | External Height (mm) | External Width (mm) | External Depth* (mm) | Internal Height (mm) | Internal Width (mm) | Internal Depth (mm) | Capacity (litres) | Net Weight (kg) | No. of Doors | No. of Shelves | Rows of Hanging Files | Capacity Hanging Files |
|-------|----------------------|---------------------|----------------------|----------------------|---------------------|---------------------|-------------------|-----------------|--------------|----------------|-----------------------|------------------------|
| M-235 | 1000 | 600 | 450 | 975 | 575 | 400 | 236 | 95 | 1 | 2 | 3 | 1.74 |
| M-535 | 1500 | 900 | 450 | 1475 | 875 | 400 | 534 | 140 | 2 | 3 | 4 | 3.52 |
| M-680 | 1900 | 900 | 450 | 1875 | 875 | 400 | 680 | 225 | 2 | 4 | 6 | 5.28 |
| M-920 | 1900 | 1220 | 450 | 1875 | 1195 | 400 | 920 | 275 | 2 | 4 | 6 | 7.20 |


*Projection of handle (50mm) not included

OPTIONAL FITTINGS


ARCHIVE CABINET




DATAGUARD NT

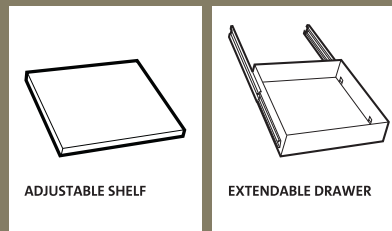



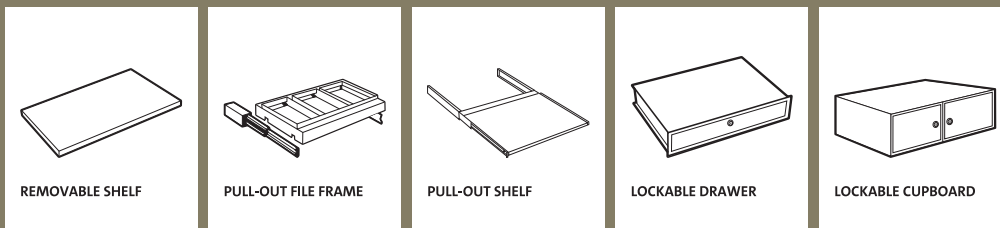


DPC

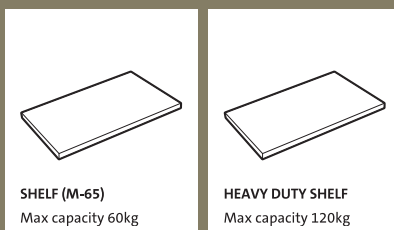



DUOFORCE T2 / TRIFORCE T2





DUOGUARD

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| SHELF Max capacity 60kg | HEAVY DUTY SHELF Max capacity 120kg | EXTENDABLE SHELF | EXTENDABLE DRAWER | LOCKABLE COMPARTMENT |







EUROPA DEPOSIT

| | |
|---|---|
|  |  |
| RETAINING SHELF | RETAINING CUPBOARD |

RHINO MK II

| | |
|---|--|
|  |  |
| REMOVABLE SHELF | EXTENDABLE DRAWER |

PROGUARD

| | | | | | |
|---|---|--|---|--|--|
|  |  |  |  |  |  |
| REMOVABLE SHELF* M-65: 20x375x350 M-120—M-305: 20x475x376 M-365: 20x710x542 M-370: 20x550x400 | EXTENDABLE SHELF M-120—M-305: 37x455x376 M-370: 37x530x400 M-465: 20x550x430 | EXTENSIBLE TRAY M-120—M-305: 37x460x361 M-370: 37x535x385 M-465: 37x535x415 | LOCKABLE DRAWER M-120—M-305: 100x460x336 M-370: 100x535x360 M-465: 100x535x390 | LOCKABLE COMPARTMENT M-120—M-305: 335x467x358 M-370: 335x562x382 M-465: 335x562x412 | EXTENSIBLE FILE FRAME M-120—M-305: 37x460x376 M-370—M-465: 37x535x376 |

www.chubbsafes.com

Authorised dealer

